


51 11 185

**Removing and installing/replacing side ornamental grille in bumper trim (to 03/2010)**




**Special tools required:**

- [00 9 323](#)

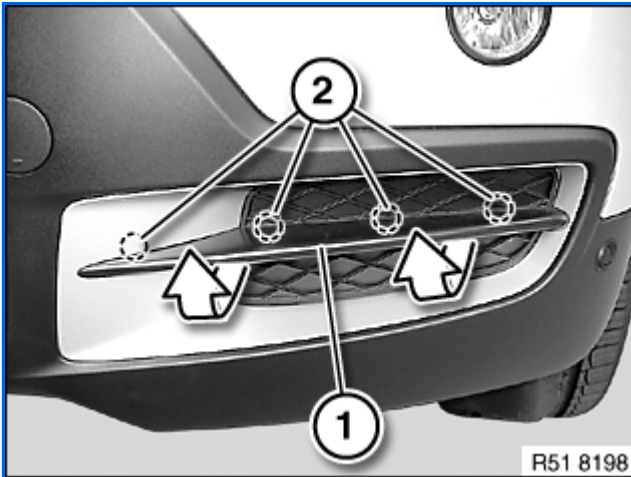

Detach side gill (1) in direction of arrow from latch mechanisms (2).

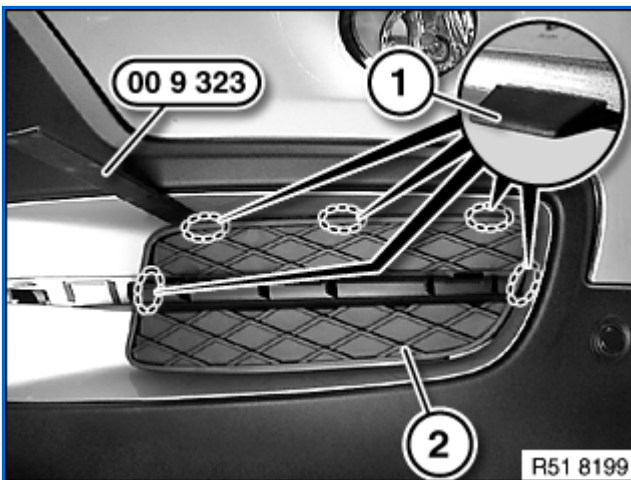

Push down latch mechanisms (1) with special tool [00 9 323](#) and remove ornamental grille (2) towards front.

*Installation note:*

Latch mechanisms (1) must not be damaged.